


**MULTIPLE PAIR**

**UL Type CMR, CL3R, 75°C  
Overall Shield  
PVC Insulation & PVC Jacket  
Copper Conductors**

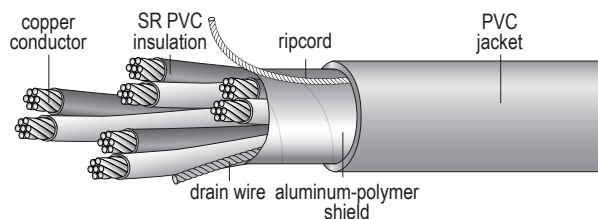

Catalog Number	Size AWG	Number of Pairs	Number of Strands	Insulation Thickness Mils	Jacket Thickness Mils	Overall Diameter Inches	Net Weight Lbs/Mft
HW403 02202	22	2	7	10	15	0.20	9
HW403 02203	22	3	7	10	15	0.21	12
HW403 02204	22	4	7	10	15	0.23	15
HW403 02206	22	6	7	10	15	0.28	21

**APPLICATION:**

For use in remote control signaling and power-limited circuit applications where protection from electrostatic interference is required, for security, intercom, public address, sound and audio systems.

**CONDUCTORS:**

Stranded soft bare annealed copper per ASTM B-3

**INSULATION:**

Semi-rigid PVC

**OVERALL SHIELD:**

Aluminum-polymer tape providing 100% coverage with a flexible 7-strand tinned copper drain wire

**JACKET:**

Gray PVC with a ripcord applied longitudinally under the jacket to facilitate stripping.

**FLAME TESTS:**

UL 1666 Flame Test

**COLOR CODE:**

See Appendix, Chart 2

**ADDITIONAL STANDARDS:**

- UL Standard 13, NEC Article 725 Type CL3R
- UI Standard 444, NEC Article 800 Type CMR