

LED PREMIUM VERSION OF THE ORIGINAL FLUORESCENT DUAL LIGHT SURFACE MOUNT FIXTURES


Thin-Lite's LED Dual surface mount fixtures are designed for high light output with low amp draw. They offer years of reliable, virtually maintenance free service. Equipped with Non-yellowing diffuser lens with or without wood grained trim and white powder coated aluminum housings. One Touch dimming switch with unlimited dimming levels, Patented "Memory Set" technology retains user programmed brightness settings.

LED life of 100,000 Hrs., Wide Voltage Range Input of 8 -30 VDC, Over Voltage Protection that resets at 28 VDC are standard.

Color Rendering Index (CRI) 90.

Warranty: 3 years.

Also Available in Fluorescent.

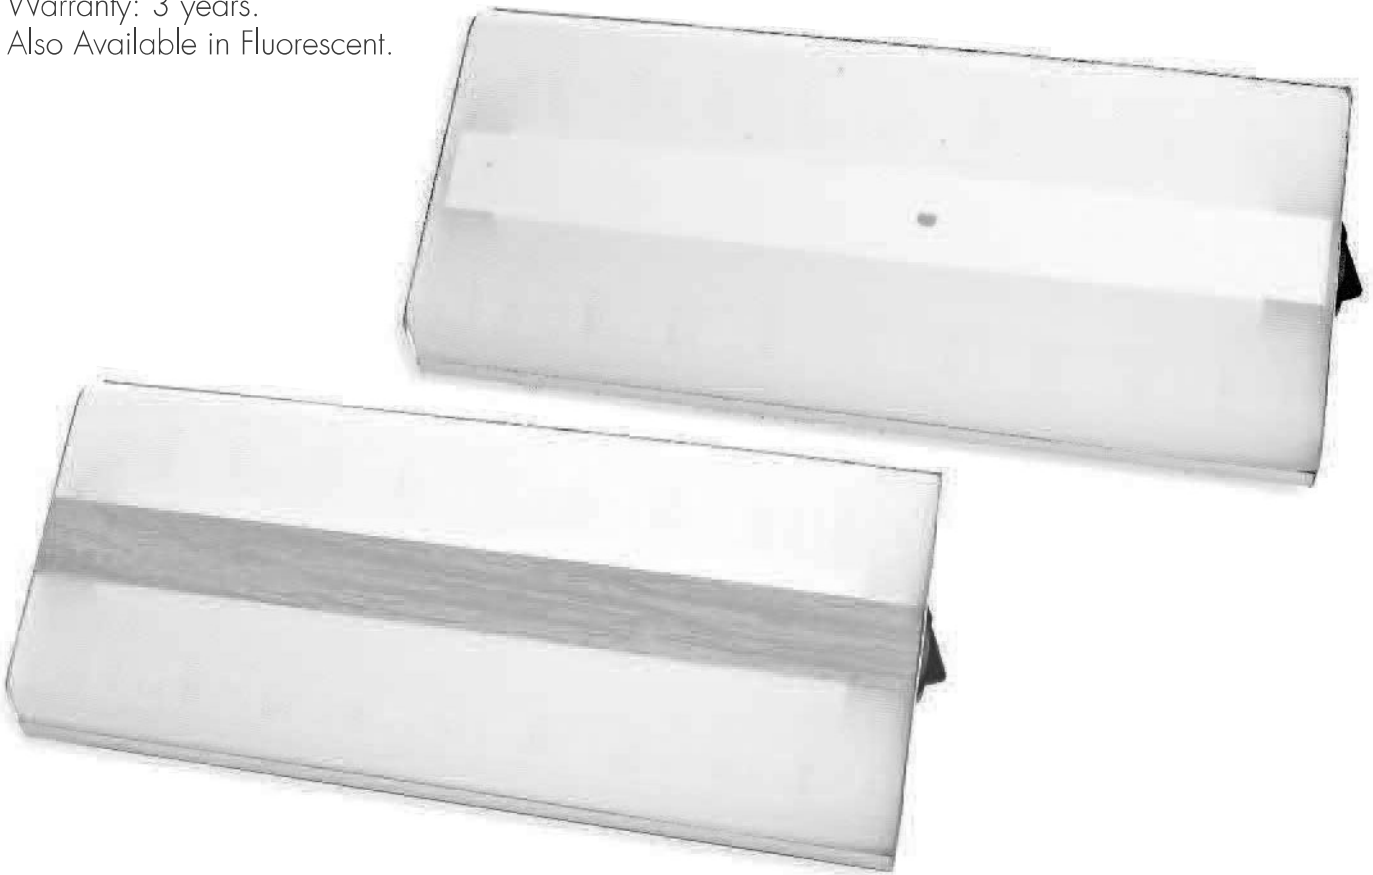

Model No.	LED112P, LED112NTP			LED116P, LED116NTP			LED126P		
Color Temperature	**3000K	4000K	5000K	**3000K	4000K	5000K	**3000K	4000K	5000K
Watts	0/9.6			0/14.4			0/19.2		
No. of LEDs	48			72			96		
Amp Draw @12VDC	0/0.80			0/1.25			0/1.60		
Equivalent Lumens	0/1785	0/1920	0/2304	0/2745	0/2880	0/3264	0/3705	0/3840	0/4224
Dimensions	12.25"L X 5.5"W x 1"			18"L x 5.625"W x 1.375"			21.312"L X 5.5"W x 1"		
Weight	0.60 lbs.			0.90 lbs.			0.95 lbs.		
Lens P/N	D-112, D-112NT			D-116, D116NT			D-126		
Case Qty:	20			20			20		

****3000K Special Orders only.**